

Speed Level

Snorkel



- Working height up to 36ft.
- Automatic platform leveling on slopes or uneven ground
- Rough terrain features include 4WD, oscillating front axle, high grip tyres
- 19°/35% gradeability
- Proportional drive/lift controls for smooth precise operation
- Diesel power

SR2684SL
SR3084SL

SR26/3084SL speed level specifications

	SR2684SL	SR3084SL
max. working height A	32ft.	36ft.
max. platform height B	26ft.	30ft.
max. drive height	26ft.	30ft.
platform capacity (SWL)	1,500lb.	1,300lb.
platform size (inside guardrails)	68in.x144in.	68in.x167in.
platform size (with deck extended)	68in.x181in.	n/a
stowed height C	102.5in.	102.5in.
stowed length D	149in.	173in.
width E	84in.	84in.
wheelbase F	100in. x 84in.	100in. x 84in.
height (guardrails folded)	3ft.7in.	3ft.7in.
gross weight	6,945lb.	7,090lb.
drive speed - max	3.1mph.	3.1mph.
with platform raised	0.45mph.	0.45mph.
gradeability	19°/35%	19°/35%
inside turning radius	12ft.10in.	12ft.10in.
axle ground clearance	8in.	8in.
chassis ground clearance	12.6in.	12.6in.
lift speed - raise/lower	21/32 sec	24/36 sec
drive system	four wheel with hydraulic motors	
platform leveling	13° to either side; 9° fore and aft	
tires	26 x 12.00 - 12 NHS. Super Terra-Grip, poly-filled	
parking brake	spring-applied/hydraulically-released, multiple disc	
control system	proportional, joystick controller with thumb rocker steering. Automatic leveling control (inoperable above interlock height)	
power source engine	Perkins 403 diesel, 3 cylinder water cooled engine. 19.5hp at 3000 rpm	

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine. Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.



All models have oscillating axles to keep drive wheels in contact with uneven ground and have high levels of gradeability for tough sites and loading ramps.




BP1, SR26/3084SL, USA 12/07

standard features

- Diesel power
- Descent alarm
- Hour meter
- Speed level - automatic powered platform leveling
- Oscillating front axle
- Poly-filled high grip tires
- Dual multi-disc brakes
- One-hand, proportional controls
- Wired for AC outlet on platform
- Fold-down guardrails
- 1 year parts and labor warranty
- 5 years structural warranty

options

- All motion alarm
- Flashing amber beacon and horn
- Diesel exhaust scrubber
- Special paint colors
- Environmental green oil

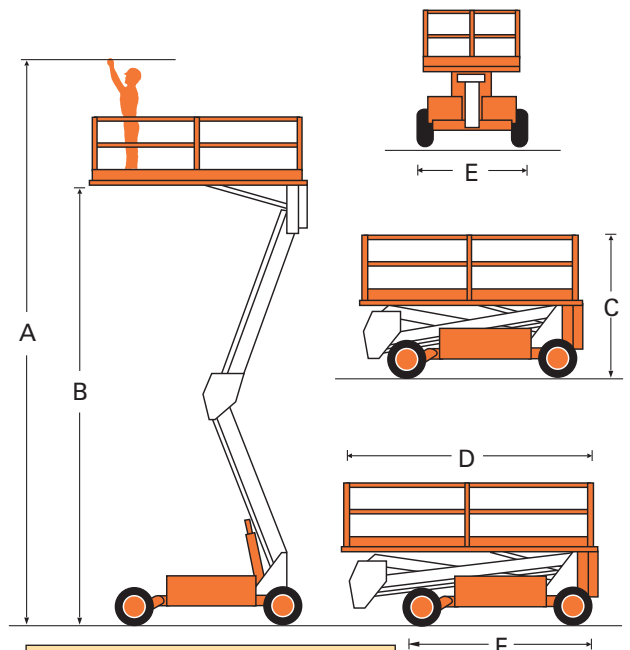

Snorkel PO Box 1160, St. Joseph, MO 64502-1160, USA
Tel: +1 (785) 989-3000 **Toll Free:** +1 (800) 255-0317
Sales fax: +1 (785) 989-3070 **Parts fax:** +1 (785) 989-3077
www.snorkelusa.com

Meets or exceeds applicable requirements of OSHA, ANSI A92.6 and CSA B354.1-04

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
Snorkel
 INTERNATIONAL